




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 : <b>G01N 17/02</b>	<b>A1</b>	(11) International Publication Number: <b>WO 00/34760</b> (43) International Publication Date: <b>15 June 2000 (15.06.00)</b>
<p>(21) International Application Number: <b>PCT/US99/29203</b></p> <p>(22) International Filing Date: <b>9 December 1999 (09.12.99)</b></p> <p>(30) Priority Data: <b>60/111,735</b>      <b>10 December 1998 (10.12.98)</b>      <b>US</b></p> <p>(71) Applicant (for all designated States except US): <b>BAKER HUGHES INCORPORATED [US/US]; 3900 Essex Lane, Suite 1200, Houston, TX 77027 (US).</b></p> <p>(72) Inventor; and (75) Inventor/Applicant (for US only): <b>JOVANCICEVIC, Vladimir [-/US]; 2231 Shade Crest Drive, Richmond, TX 77469 (US).</b></p> <p>(74) Agents: <b>CURBELO, Pamela et al.; Baker Hughes Incorporated, 3900 Essex Lane, Suite 1200, Houston, TX 77027 (US).</b></p>	<p>(81) Designated States: <b>AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</b></p> <p><b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	

(54) Title: **ELECTROCHEMICAL NOISE TECHNIQUE FOR CORROSION**

## (57) Abstract

The present invention relates to a unique electrochemical noise corrosion rate determination technique and system. The system employs a single working electrode (3), a counter electrode (5), a reference electrode (1), and a measurement system for determining potential between the working (3) and reference (1) electrodes and current between the working (3) and counter (5) electrodes. The technique comprises measuring the potential between the working and reference electrodes (1) at open circuit over a given period of time, switching to potentiostatic control, measuring the current between the working (1) and counter (5) electrodes, and using the measured potential and current to determine the general corrosion rate and localized corrosion rates.

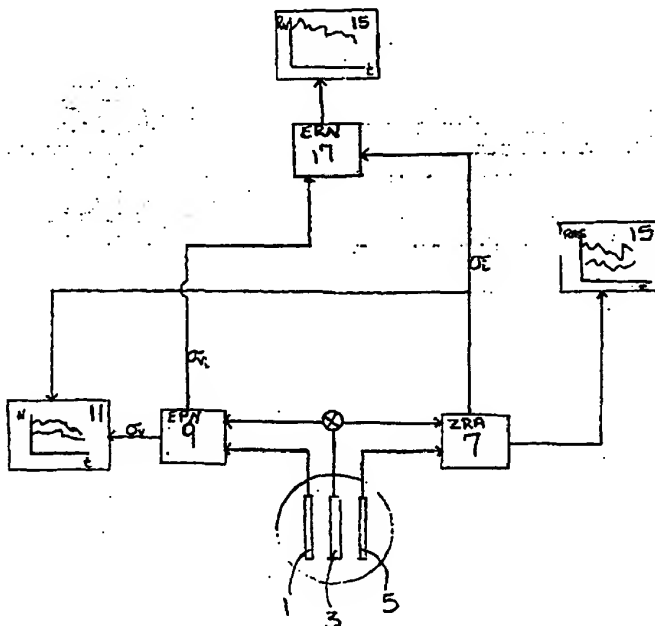

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## ELECTROCHEMICAL NOISE TECHNIQUE FOR CORROSION

## Technical Field

The present invention relates to an electrochemical noise technique for determining corrosion rate.

## 5 Background of the Invention:

Electrochemical noise (ECN) may be defined as the spontaneous fluctuations of current and potential generated by corrosion reactions. Various methods have been used to detect corrosion reactions, including a linear polarization resistance method in which a direct current (DC) signal is applied to a corroding cell consisting of two or  
10 three electrodes and the resulting DC polarization is monitored. Provided that the applied current is small so that the potential shift is less than 20 millivolts (mV), the response is linear in most cases and the measured resistance, commonly known as the polarization resistance, may be related inversely to the rate of the uniform corrosion attack. Other techniques include the application of electrochemical impedance in  
15 which a sine wave current or potential is applied, in a similar manner to the linear polarization technique, and the sine wave potential or current resulting from the applied current or potential is monitored. Alternatively, a pseudo random noise signal

can be applied to a corroding cell, with the electrochemical impedance obtained by time or frequency domain transformations.

Although the above techniques are widely employed, they: (1) possess limitations in that they only provide information on uniform corrosion conditions because they provide an average signal for the surface of the electrode being monitored; and (2) depending upon the environment, metallic material, and corrosion type, the assumption that the corrosion rate is proportional to the measured charge transfer or polarisation resistance is invalid because the corrosion is of a localized nature. These problems have been addressed by monitoring localized corrosion via the utilization of electrochemical potential noise analysis. Alternatively, by coupling current analysis with electrochemical potential noise analysis further information can be obtained. For example, two similar electrodes can be coupled together via a zero resistance ammeter with the output of the zero resistance ammeter passed to the input of the electrochemical noise analysis system. In this way, the fluctuation of the coupling current may be analyzed in essentially a similar manner as for the electrochemical potential noise analysis described previously.

U.S. Patent No. 5,139,627 to Eden et al. discloses a system which employs two working electrodes fabricated with the same material and exposed to the same corrosion conditions as the metallic surface to be tested. This system further employs means for measuring the coupling current between the working electrodes, means for measuring electrochemical potential noise originating from the electrodes, and means for comparing the coupling current with the electrochemical current noise to provide an output indicative of the degree to which corrosion is localized. Eden et al. utilize open circuit potential conditions, employing two working electrodes in an electrolyte environment wherein both electrodes are short circuited with a low resistance amp meter. The current between these two working electrodes is the result of corrosion occurring on them, with the measurement of the net current relating to the corrosion on both of them. Disadvantages of this system, however, range from the fact that the working electrodes need to be identical to obtain accurate readings and obtaining such identical electrodes is difficult, if not impossible, and also that it is unknown which

electrode is responding to reveal the corrosion, to the fact that this system requires the use of two working electrodes which limits where this system can be employed.

Furthermore, distinguishing between various types of localized corrosion is, at minimal, difficult due to the fact that both electrodes contribute to the system

5 response.

What is needed in the art is a simplified corrosion rate detection system and method.

#### Summary of the Invention:

10 The present invention relates to an electrochemical noise method for determining the corrosion rate of a conductive article, comprising: placing a working electrode, reference electrode, and counter electrode in a corrosive environment of interest, wherein said working electrode has substantially the same composition as the article; measuring potential at open circuit between the working electrode and the  
15 reference electrode over a first period of time; placing the working electrode under a potentiostatic control; and measuring current between the working electrode and the counter electrode for second period of time.

The present invention further relates to a working electrode which is composed of the material of interest; a counter electrode which is inert in an environment of  
20 interest; a reference electrode which is inert in the environment of interest; and a measurement system connected to said working electrode, counter electrode, and said reference electrode, wherein said measurement system is capable of monitoring potential between said working electrode and said reference electrode and monitoring current between said counting electrode and said working electrode.

25

#### Brief Description of the Drawings:

Referring now to the drawing, which is meant to be exemplary, not limiting:

Figure 1 is a schematic of one embodiment of the electrochemical noise system of the present invention.

Figure 2 is a schematic of another embodiment of the electrochemical noise system of the present invention.

Figure 3 is a graphical representation of potential/current versus time raw data plot for potentiostatic ECN in brine/air.

5        Figure 4 is a graphical representation of potential/current noise data versus time raw data plot for potentiostatic ECN in brine/air.

Figure 5 is a graphical representation comparing potentiostatic ECN and zero resistant ammeter mode in brine/air solution for voltage versus time.

10       Figure 6 is a graphical representation comparing potentiostatic ECN and zero resistant ammeter mode in brine/air solution for current versus time.

Figure 7 is a graphical representation of potential versus time showing the effect of flow on current/potential noise in brine/carbon dioxide solution.

Figure 8 is a graphical representation of current versus time showing the effect of flow on current/potential noise in brine/carbon dioxide solution.

15       Figure 9 is a graphical representation of potential versus time showing the effect of quaternary amine inhibitor on current/potential noise in brine/carbon dioxide solution.

20       Figure 10 is a graphical representation of current versus time showing the effect of quaternary amine inhibitor on current/potential noise in brine/carbon dioxide solution.

#### Best Mode For Carrying Out The Invention:

The present invention relates to determining corrosion rate on a metallic surface using a unique electrochemical noise technique. The present invention employs one working electrode where potential created by the corrosion of that electrode in the corrosive fluid is measured relative to a reference electrode over a distinct period of time; the working electrode is then set at the measured potential, and, without applying a potential ( $\Delta V = 0$ ), the working electrode is placed in potentiostatic control; and subsequently, the current between the working electrode and the counting electrode is measured for a second period of time. The cycle is repeated after the current

25       30

measurement. Finally, the measured current and potential are used to determine the general and localized corrosion rate.

In order to determine the corrosion rate, the working electrode is fabricated from the same material as the item of concern (i.e. the component, article...).

5 Generally, the material is a metal or metal alloy. Although the counter electrode can be formed of any material, including the same material as the working electrode, the counter electrode preferably comprises material which is inert in the particular environment of interest. For example, the counter electrode may be platinum, nickel-based (e.g., Hastalloy C276), iron based (e.g., stainless steel) or a chromium-based  
10 alloy, or mixtures and alloys thereof, or any other electrically conductive, non-corrosive material. Similar to the counter electrode, the reference electrode can comprise any material, but preferably comprises an inert, electrically conductive material which may be the same or a different material as employed by the counter electrode.

15 In operation, the working, counter, and reference electrodes are disposed in the same environment as the component of interest, in a spaced relation to one another. A potential between the working and reference electrodes is measured first at open circuit potential for a certain period of time. The period of time, which can be any length of time, is typically less than 1 minute, and preferably less than about 10 seconds  
20 (sec.), with less than about 1 sec. especially preferred for convenience and reduced testing time. At the end of the period of time, a potential equivalent to the measured potential at that time, is then applied to the working electrode by switching from open circuit to potentiostatic control. Once potentiostatic conditions have been established, the current between the working electrode and the counter electrode can be measured  
25 for a second period (although this second period of time can be any period, the same amount of time is preferred). A new cycle can then be performed after the potentiostatic current measurement.

The measured potential and current noise can then be utilized to determine the general and localized corrosion rate using conventional calculation techniques which  
30 typically use the average current (root mean square (RMS)) and average potential

(RMS<sub>v</sub>) and standard deviation of current ( $\sigma_i$ ). For example, general corrosion ( $I_{corr}^G$ ) is known to be related to resistance noise ( $R_N$ ) as follows:

$$I_{corr}^G \propto \frac{1}{R_N} \quad (1)$$

where

$$R_N = \frac{\sigma_v}{\sigma_i} \quad (2)$$

while localized corrosion ( $I_{corr}^L$ ) is a function of the electrochemical current noise ( $\sigma_i$ ) as follows:

$$I_{corr}^L \propto \sigma_i$$

10 Referring to Figure 1, which illustrates one potential embodiment of the present invention, a working electrode 3 is disposed between and in spaced relation to both reference electrode 1 and counter electrode 5. The counter electrode 5 and working electrode 3 are connected to a potentiostat 7 which feeds into comparator 17 ( $R_N$ ) and a localized corrosion measurement device 15 capable of measuring localized corrosion  
15 as a function of time. Meanwhile, reference electrode 1 and working electrode 3 are connected to electrochemical potential noise monitoring apparatus 9 (i.e., voltmeter) which feeds into comparator 17 and power density analyzer 11. From that input, in combination with input from the electrochemical current noise measuring apparatus 7, localized corrosion rate can be determined. Electrochemical potential noise monitoring  
20 apparatus 9 additionally feeds input to comparator 17 to determine general corrosion rate as a function of time.

#### EXAMPLE 1

The following example is the measurement of corrosion rate for a mild steel  
25 (e.g., ASTM steel C1018) in a mixture of brine, hydrocarbon, and carbon dioxide environment using the embodiment shown in Figure 1.

The counter and reference electrodes are Hastalloy C276 (commercially available from Metal Samples, Inc., GA), while the working electrode is mild steel C1018.

The electrodes 1, 3, 5 are disposed in the brine, hydrocarbon, and carbon dioxide. After the potential is measured for 10 sec., between the working and reference electrodes at open circuit, the potential is then fixed ( $\Delta V = 0$ ) and the current is measured between the working and counter electrodes for 10 seconds, while the potential between the working electrode 3 and the reference electrode 1 is measured by the high sensitivity, high resistance voltmeter 9.

Consequently, the present invention employs the potential and current noise to determine general corrosion rate (from  $R_N$ ) and the current noise to quantitatively assess the degree and nature of localized corrosion from the pattern recognition analysis.

#### EXAMPLE 2

The current and potential noise data were sampled between a 1 and 60 second period with current being measured when potential was held and the potential measured with the current open-circuit. The standard mode of operation used the system illustrated in Figure 2, and consisted of the following sequence:

1. Measure the potential between working and reference electrode (1 to 60 sec.) – period A;
2. Record the potential at the end of period A;
3. Hold the potential (0.1 to 60 sec.) – period B;
4. Measure and record the current at the end of period B;
5. Release the potential hold (0 to 60 sec.) – period C; and
6. Return to '1'.

Figure 3 shows the potential/current versus time curves in a brine/air solution obtained with the potentiostatic ECN (P-ECN) technique. The time periods chosen for this test were A equals 40 seconds, B equals 40 seconds, and C equals 0. During the

potential hold off period (A), the potential was measured and the current was zero. During the potential hold on period (B), the potential was constant (potential noise value) and the current was measured. The initial increase in current was due to the double layer capacitive current followed by a continuous increase/decrease in  
5 anodic/cathodic current. The first value after the initial current increase was recorded (current noise) and plotted together with the potential noise as shown in Figure 4. It is important to note an increase in potential noise at about 1,700 seconds that coincided with a decrease in current noise, suggesting a good correlation between the two. In this test run, due to the low sampling rate, high frequency noise was not observed.

10 The comparison between the current and potential noise obtained with conventional ECN (zero-resistance mode (ZRM)) and potentiostatic ECN in brine/air solution was shown in Figures 5 and 6. In this system, the corrosion rate was quite high with one working electrode corroding at a higher rate than the other electrode ( $\Delta V=13$  millivolts (mV) in ZRM). In the potentiostatic mode, both current and  
15 potential noises increased significantly (increase in rms and standard deviation) due to an increase in corrosion rate. This result showed that the second working electrode was polarizing the 'real' working electrode by -12 mV in the ZRA mode, thus lowering the corrosion rate by at least factor of two compared to the potentiostatic mode. This polarization of the working electrode over long period of time may have  
20 significant effect on the measured corrosion rate. Thus, in this case both general and localized corrosion rates were significantly higher when measured by the potentiostatic ECN. The corrosion rate measurements at the open-circuit potential, without induced polarization, was an important advantage of the potentiostatic ECN relative to the ZRA mode. If the second electrode in the couple had been selected for the  
25 potentiostatic ECN it would be expected that the potential and current would both have dropped. This confirms that in ECN monitoring there is an applied potential between the two 'non' identical electrodes.

The potentiostatic ECN technique was further evaluated for the effect of stirring and the addition of a corrosion inhibitor on current and potential noise in a

carbon dioxide (CO<sub>2</sub>)-containing brine solution. The parameters used in this study were, A equals 1 second, B equals 10 seconds, C equals 0 seconds.

Figures 7 and 8 show the current and potential noise in the brine/CO<sub>2</sub> solution with and without stirring obtained using the potentiostatic ECN technique. It can be seen that stirring (at about 100 revolutions per minute (rpm) or less) has a significant effect on current and potential noise resulting in ten-fold reduction in fluctuations (i.e. standard deviations). The rms of current noise was also decreased by a similar amount. Thus, the changes in current and potential fluctuations with time were related to changes in flow rate/flow regime in this particular system.

The effect of an inhibitor (e.g. quaternary amine) on the current and potential noise in stirred brine/CO<sub>2</sub> solution was shown in Figures 9 and 10. The addition of 100 parts per million (ppm) of quaternary amine resulted in a sudden decrease in current noise root mean square (rms) and significant reduction in current fluctuations ( $\sigma_i$ ) indicating a reduction in general corrosion by about 95% (Table 1). At the same time, some increase in localized corrosion was observed ( $\sigma_v$ /rms; about 0.6). The results showed that in the P-ECN mode the corrosion rate reduction can be obtained either from the change in rms of current noise or from the noise resistance ( $\sigma_v/\sigma_i$ ). In the ZRA mode only trends in corrosion rates can be obtained from the rms but not the absolute values. This is another important advantage of the P-ECN compared to the ZRA measurements.

TABLE 1				
	rms <sub>v</sub> (mV)	rms <sub>i</sub> ( $\mu$ A)	$\sigma_v$ (mV)	$\sigma_i$ ( $\mu$ A)
Blank	2.5	13.0	0.8	1.0
quaternary amine	5.0	0.5	0.9	0.5

The system of the present invention can be further simplified by automating the system using an appropriate computer system and software. The software should be able to control all necessary switching and measurements as described herein. By

automating the current system, error introduced due to human interaction and delay can be eliminated.

The present invention is a simplified corrosion measurement system and method. Unlike the prior art which requires the use of two identical working electrodes formed of the same material as the article, the present invention utilizes one working electrode (different counter and reference electrodes), thereby eliminating error created by differences between the electrodes since all the measured data are from the same electrode. Additional advantages include that there is an improved correlation between the current and potential noise (i.e. same source); corrosion rate is measured at open circuit potential (OCP) without disturbing the system; and there is little or no loss of long-term current/potential drift signal (DC components). Furthermore, because only one working electrode is required, the present invention can be utilized to determine corrosion rate in applications where the use of the two working electrode system is, if not impossible, at least impractical, such as rotating disc and rotating cylinder electrode systems, or any other high shear environment. Additionally, in the two working electrode system, it was unknown which electrode was corroding and thereby providing the data. In the present system, it is clearly established where the data originates, allowing good correlation between current and potential noise to be established. Finally, unlike the prior art, the size and geometry of the working electrode of the present invention is not limited.

While preferred embodiments have been shown and described, various modifications and substitutions may be made thereto without departing from the spirit and scope of the invention. Accordingly, it is to be understood that the present invention has been described by way of illustrations and not limitation.

What is claimed is:

## CLAIMS

1. An electrochemical noise method for determining corrosion rate of an electrically conductive article, comprising:
  - a. placing a working electrode (3), reference electrode (1), and counter electrode (5) in a corrosive environment of interest, wherein said working electrode
  - 5 (3) has substantially the same composition as the article;
  - b. measuring potential at open circuit between the working electrode (3) and the reference electrode (1) over a first period of time;
  - c. placing the working electrode (3) under a potentiostatic control; and
  - d. measuring current between the working electrode (3) and the counting
  - 10 electrode for second period of time.
2. An electrochemical noise method for determining corrosion rate as in Claim 1, wherein said first period of time and said second period of time are substantially equivalent.
3. An electrochemical noise method for determining corrosion rate as in Claim 1, wherein, when under potentiostatic control, the working electrode (3) is set at the substantially a set potential substantially equivalent to the measured potential.
4. An electrochemical noise method for determining corrosion rate as in Claim 3, wherein the set potential is substantially equivalent to the measured potential at the end of said first period of time.
5. An electrochemical noise method for determining corrosion rate as in Claim 1, wherein said counter electrode (5) and said reference electrode (1) are composed of a material which is substantially inert in said corrosive environment.

6. An electrochemical noise corrosion measuring system as in Claim 1, further comprising repeating steps b, c, and d of Claim 1.

7. An electrochemical noise corrosion measuring system, consisting essentially of:

- a. a working electrode (3) which is composed of the material of interest;
- b. a counter electrode (5) which is inert in an environment of interest;
- 5 c. a reference electrode (1) which is inert in the environment of interest; and
- d. a measurement system connected to said working electrode (3), counter electrode (5), and said reference electrode (1), wherein said measurement system is capable of monitoring potential between said working electrode (3) and said reference
- 10 electrode (1) and monitoring current between said counting electrode and said working electrode (3).

8. An electrochemical noise corrosion measuring system as in Claim 7, wherein said counter electrode (5) and said reference electrode (1) are composed of a material which is substantially inert in said corrosive environment.

9. An electrochemical noise corrosion measuring system as in Claim 7, further comprising a processing unit which is capable of automatically measuring potential at open circuit between the working electrode (3) and the reference electrode (1) over a first period of time; placing the working electrode (3) under a potentiostatic control; and measuring current between the working electrode (3) and the counting electrode for second period of time.

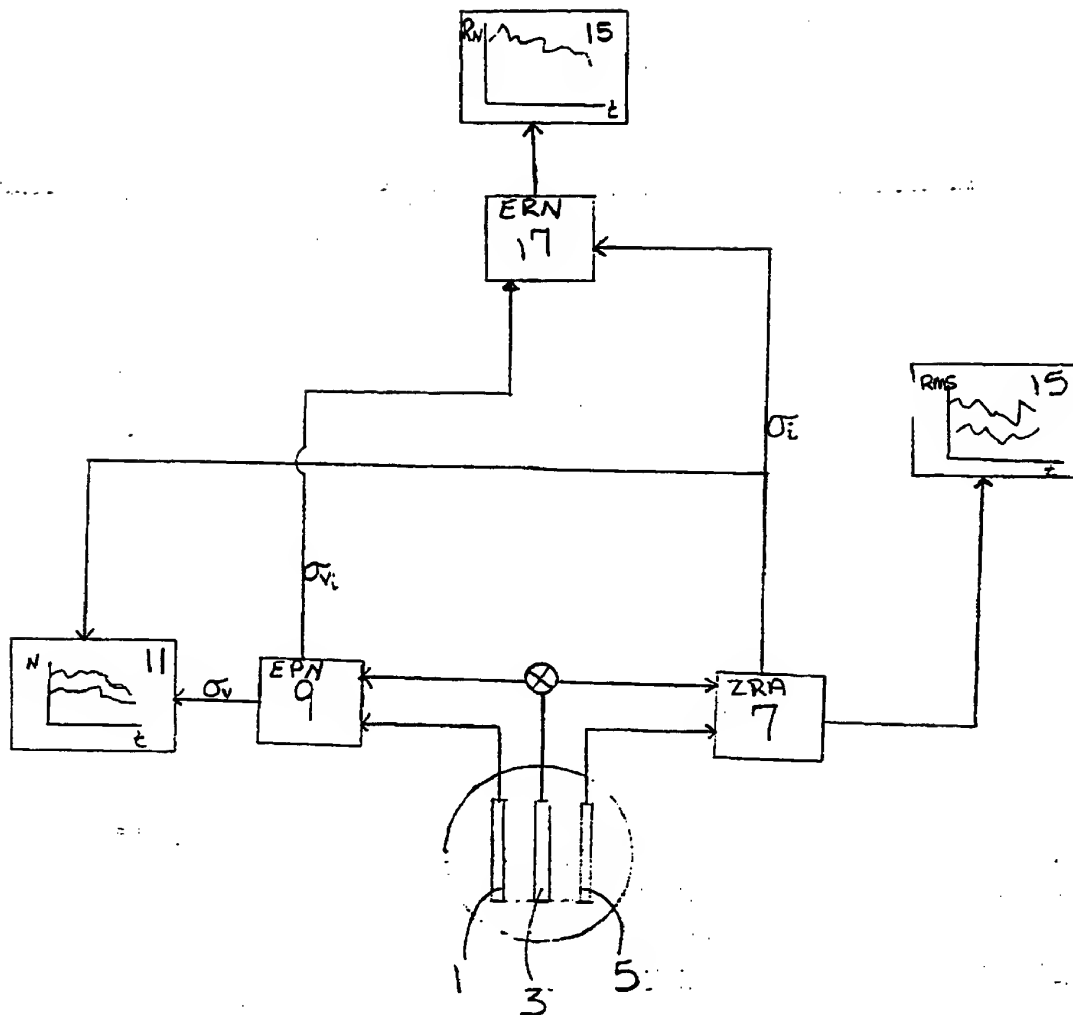


Fig. 1

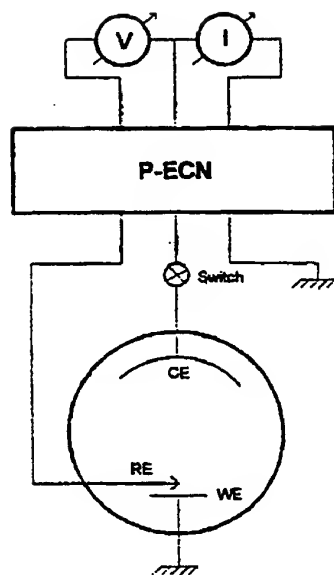


Figure 2

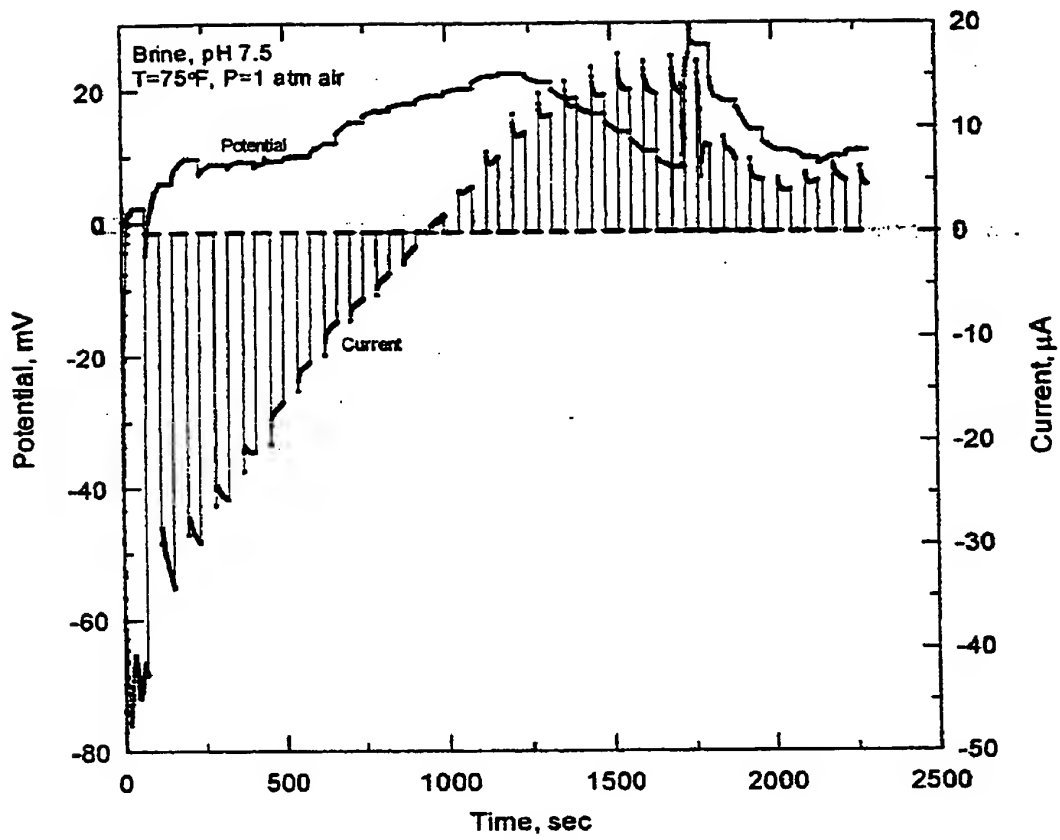


Figure 3

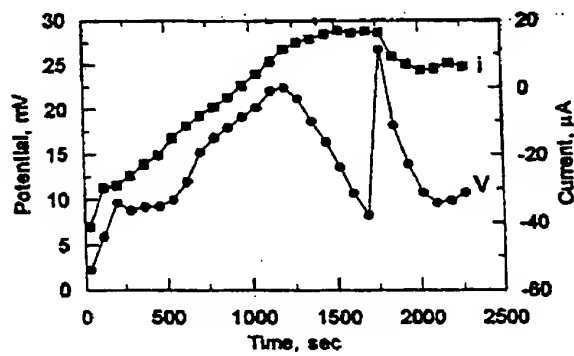
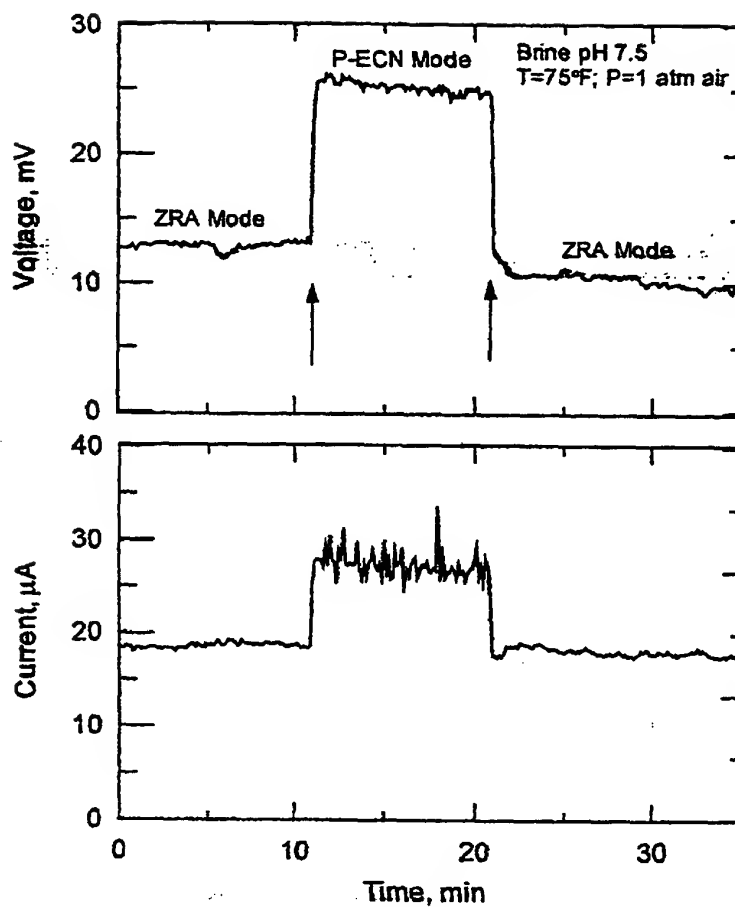


Figure 4



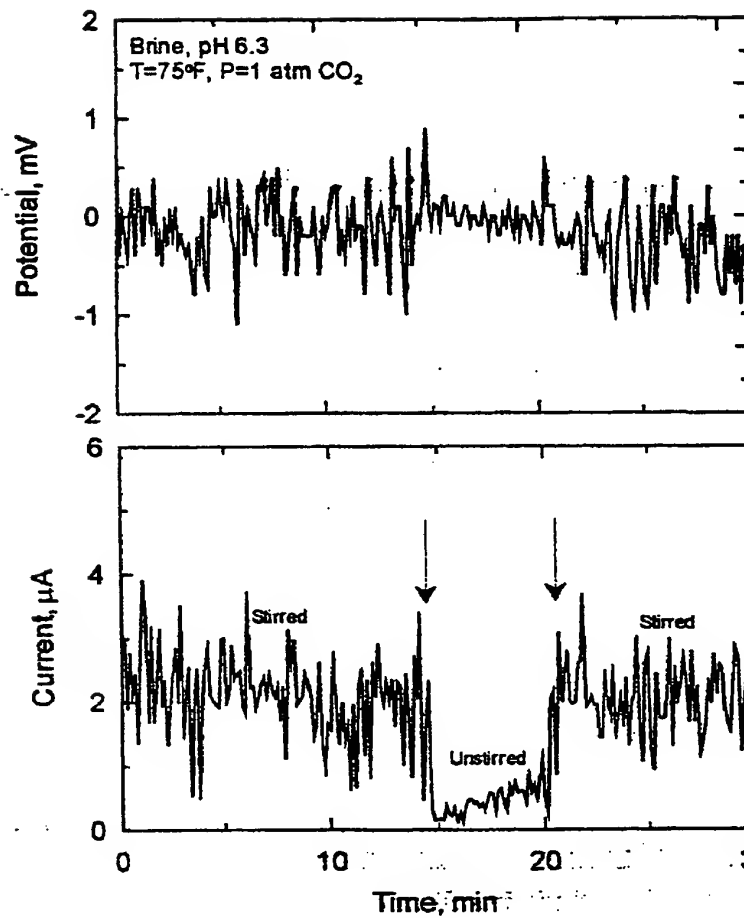


Figure 7

Figure 8

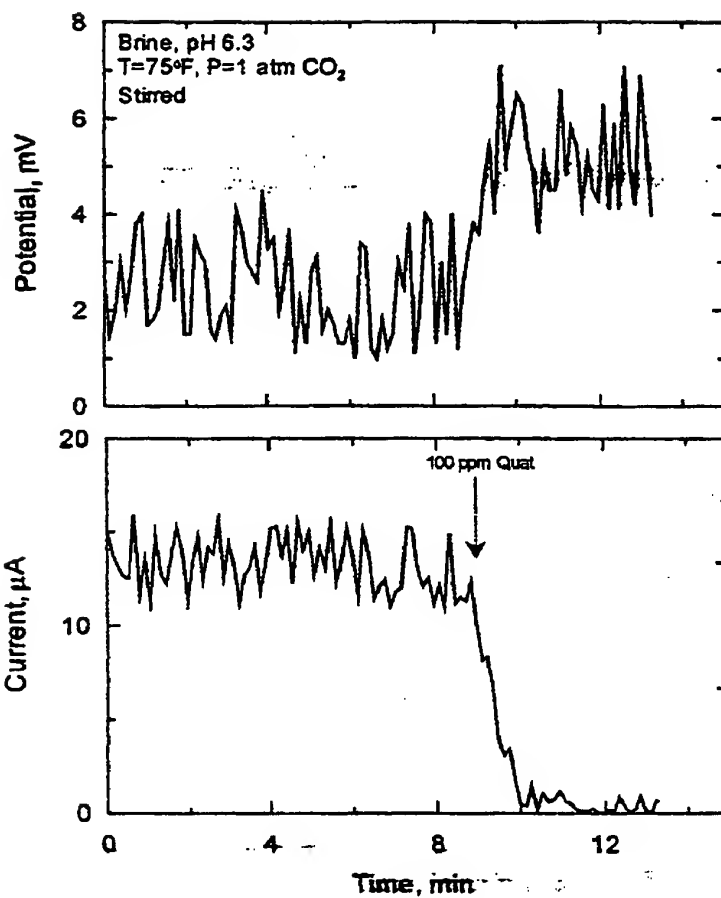


Figure 9

Figure 10

## INTERNATIONAL SEARCH REPORT

Int. l. Application No

PCT/US 99/29203

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 G01N17/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y A	GB 2 218 521 A (APPLIED CORROSION MONITORING) 15 November 1989 (1989-11-15)  page 2, paragraph 3 page 3, paragraph 8 -page 7, paragraph 3 figures 1,2,6	1-4  5,6 7-9
X Y A	WO 98 50786 A (UNIVERSITY OF CHICAGO) 12 November 1998 (1998-11-12)  page 6, line 13 -page 13, line 32 figures; table 3	7-9  5,6 1,2

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&amp;" document member of the same patent family

Date of the actual completion of the international search

15 May 2000

Date of mailing of the international search report

24/05/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3018

Authorized officer

Johnson, K

Form PCT/ISA/210 (second sheet) (July 1992)

page 1 of 2

BNSDOCID: &lt;WO\_0034780A1\_1&gt;

## INTERNATIONAL SEARCH REPORT

Int. l. Application No

PCT/US 99/29203

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3 716 460 A (WEISSTUCH A ET AL) 13 February 1973 (1973-02-13) column 3, line 59 -column 5, line 24 figure 1	1-4,6,7, 9
A	SOVIET PATENT ABSTRACTS Section Ch, Week 199003 Derwent Publications Ltd., London, GB; Class J03, AN 90-020601/03 XP002137607 & SU 1 469 431 A (VETROV V V) 30 March 1989 (1989-03-30) abstract	1-4,6,7, 9
A	US 5 139 627 A (EDEN D ET AL) 18 August 1992 (1992-08-18) cited in the application	

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/29203

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 2218521	A	15-11-1989	GB 2218520 A	15-11-1989
WO 9850786	A	12-11-1998	US 5888374 A	30-03-1999
			AU 7158998 A	27-11-1998
US 3716460	A	13-02-1973	BE 774808 A	01-03-1972
			CA 962334 A	04-02-1975
			GB 1357573 A	26-06-1974
US 5139627	A	18-08-1992	AT 78592 T	15-08-1992
			AU 7350887 A	01-12-1987
			DE 3780633 A	27-08-1992
			DE 3780633 T	11-03-1993
			EP 0302073 A	08-02-1989
			WO 8707022 A	19-11-1987

Form PCT/ISA/210 (patent family annex) (July 1992)